



THE LASER'S EDGE

**VISIT US ONLINE @
BEELINE-CO.COM**

RUNWAY LIFT ASSEMBLY

29600

**Easy to operate lift makes moving
removable sections a snap!**

The 29600 Runway Lift Assembly uses 4 caster wheels that allow for easy movement in any direction and does not require the use of electric, air or hydraulics power. When the wheels are not engaged the lift does not affect the stability or load capacity of the runway section. The lift can be assembled onto any existing removable section in a matter of minutes and contains leveling and height adjustments to accommodate variations in installation heights.

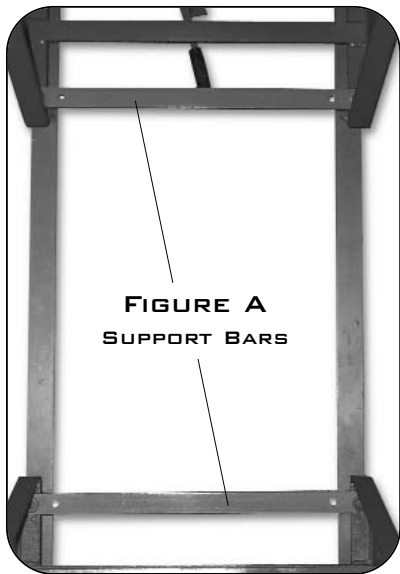
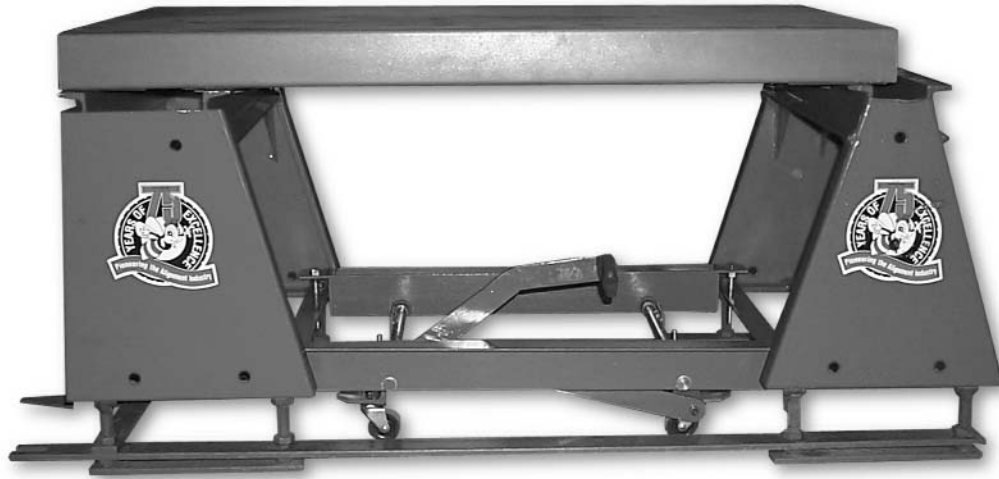


FIGURE A
SUPPORT BARS

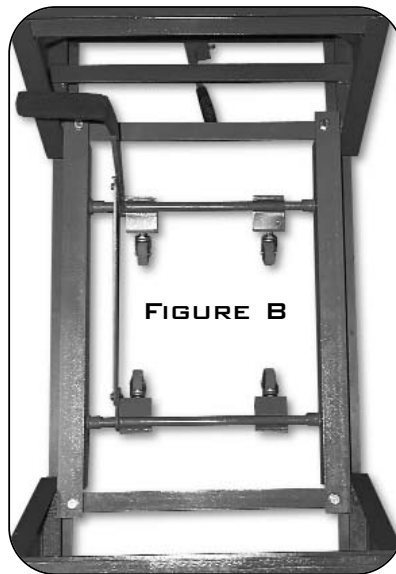


FIGURE B

THE INSTALLATION IS FAST AND EASY.

To install the 29600 Runway Lift Assembly, simply remove four leg nuts, place the support bars on the riser studs (Figure A) and replace the four leg nuts. Then, place the Lift Assembly over the support bars with the wheels in the rolling position (Figure B). Adjust the corner bolts until there is approximately 3/8 inch clearance under the unit. After the unit has the required clearance, secure the locking nuts to the underside of the Lift Assembly. Disengage the wheels to make sure the unit rests solidly on the ground. Now engage the wheels and move the section around. The tremendous advantage of rolling each section compared to dragging them is obvious!

29600 LIFT ASSEMBLY COMPONENTS:

- A. Support Bars
- B. Lift Assembly
- C. Corner Bolts.

